
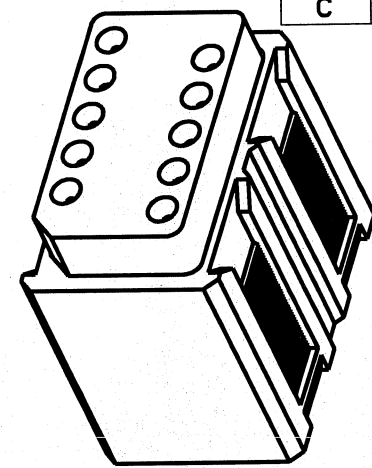
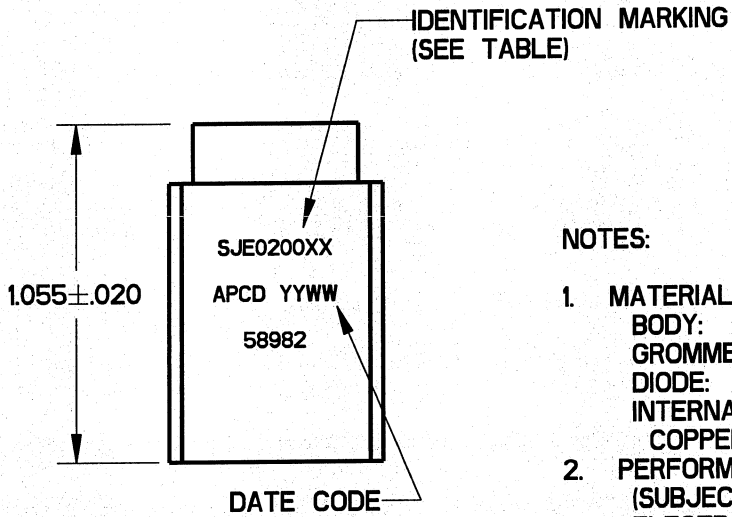
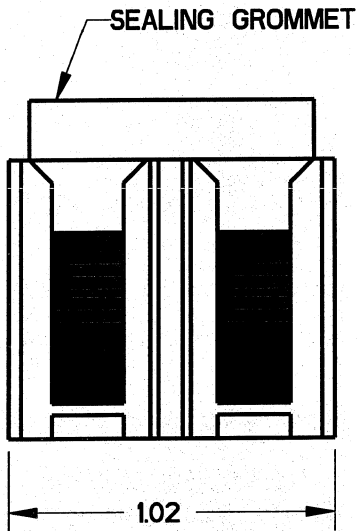


REV	ECN	APP'D
-	4000	JT 11/03/00
A	4239	JT 12/21/00
B	5722	JT 10/20/05
C	6476	JT 2/9/10

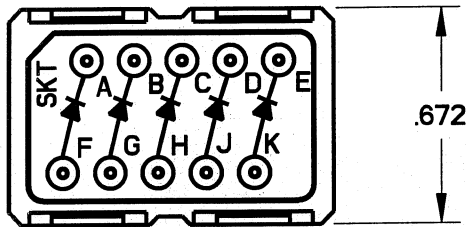

NOTES:

- MATERIALS:**
 BODY: POLYETHERIMIDE PER ASTM-D5205.
 GROMMET: SILICONE BLEND ELASTOMER.
 DIODE: MIL-S-19500 (SEE TABLE)
 INTERNAL PIN CONTACT:
 COPPER ALLOY, HARD GOLD PLATE PER MIL-DTL-45204.
- PERFORMANCE SPECIFICATION PER MIL-T-81714.**
 (SUBJECT TO LIMITATIONS OF THE ELECTRONIC COMPONENTS)
 TEMPERATURE: -65°C TO 200°C.
 INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 25°C.
 DIELECTRIC WITHSTANDING VOLTAGE:
 1500 VRMS AT SEA LEVEL,
 AND 200 VRMS AT 100,000 FT. ALTITUDE.
 CURRENT RATING: 7.5A FOR SIZE 20 CONTACTS.
 VIBRATION AND SHOCK: PER MIL-T-81714 PARA 3.5.8 & 9.
- MODULE ACCEPTS SOCKET CONTACTS (10) M39029/22-192.
- MODULE TO BE MOUNTED ON M81714/67 RAIL SYSTEM.

IDENTIFICATION MARKING		COMPONENT
PCD P/N	REF MIL P/N	
SJE020001	M81714/62-20BT	JANTX1N5552
SJE020008	M81714/62-20BP	JANTX1N5550
SJE020009	-	JANTX1N4246
SJE020016	-	JANTX1N5618
SJE020065	-	1N5616

DIMENSIONS	TOLERANCES	PROJECTION
ANSI Y14.5M UNITS: INCHES Pro/E FILE	.XX ±0.01 .XXX ±0.005 ANGLES ±1.0°	

Amphenol Pcd
SPECIFICATION DRAWING

ENGR
J. TON 07/01/00

TITLE		
SJE SERIES ELECTRONIC MODULE		
SIZE A	DWG NO. SJE020001C	REV C

THIS DOCUMENT CONTAINS
PROPRIETARY INFORMATION WHICH
IS THE CONFIDENTIAL PROPERTY
OF AMPHENOL PCD INC., BEVERLY, MA

CHKD 2/9/10

APPD 2/9/10

CODE: 58982	SCALE: 5:3	SHEET 1 OF 1
-------------	------------	--------------